



Ultrafuse[®] ABS

Strong | impact resistant | rigid

Extended TDS

Complete Technical Documentation and
Testing Summary

Contents

Technical Data Sheet	3
Mechanical Propertie Diagrams.....	6
Thermal Properties Diagrams	11
Are you looking for an updated TDS version? Check out the latest online version here.	

Technical Data Sheet

Product description (one sentence).

Filament Properties

Filament Diameter	1.75 mm	2.85 mm
Diameter Tolerance	±0.050 mm	±0.1 mm
Average ovality	<0.050 mm	<0.050 mm
Available Spool size	750 g	750 g
Available colors	natural white, black, blue, red	

Spool Properties

Spool size	750 g	2.0 kg	4.0 kg	8.0 kg
Outer diameter	200 mm	300 mm	350 mm	355 mm
Inner diameter	50.5 mm	51.5 mm	51.7 mm	36 mm
Width	55 mm	103 mm	103 mm	167 mm

Recommended 3D-Print processing parameters

Used for test specimens

Printer	FFF printer	Ultimaker 3
Nozzle Temperature ¹⁾	240 – 260 °C / 464 – 500 °F	260 °C / 500 °F
Build Chamber Temperature	-	Closed chamber, passively heated
Bed Temperature	90 – 110 °C / 194 – 230 °F	100 °C / 212 °F
Bed Material	Tape, spray, glue	Glass+3DLac
Nozzle Diameter	≥ 0.4 mm	0.4 mm
Print Speed	40 - 80 mm/s	40 mm/s
Max Volumetric Speed ²⁾	22 mm³/s	//

Please check your standard and/or high speed print profile availability for an easy start at www.forward-am.com.

¹ Fast printing might require an additional increase of the nozzle temperature; the stated printing speed of 300 mm/s is based on current validations. As equipment and technology continues to evolve, it is possible that even higher printing speeds may be attainable in the future.

² Based on Bambu Lab X1C with a nozzle diameter of 0.4 mm

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. Values in this document are average values, measured and calculated according to the instructions in the listed standards. The used specimens are produced with the Fused Filament Fabrication method. Measured values can vary depending on used print orientation and print parameters.

Please contact us for further product information, like for example REACH, RoHS, FCS.

The safety data given in this publication is for informational purposes only and does not constitute a legally binding MSDS. The relevant MSDS can be obtained upon request from your supplier or you may contact Forward AM Technologies GmbH directly at sales@forward-am.com.

Process materials in a well-ventilated room, or use professional extraction systems.

Further Recommendations

Drying recommendations to ensure printability and best mechanical properties³⁾ 60 °C in a hot air dryer or vacuum oven for 4 to 16 hours

Support material compatibility Single material breakaway

General Properties

Standard

Average Values

Filament Density⁴⁾ ISO 1183-1 1037 kg/m³

Tensile Properties⁵⁾

Standard

Average Values

XY-Direction⁶⁾XZ-Direction⁷⁾ZX-Direction⁸⁾

Tensile strength⁹⁾ ISO 527 36.3 MPa - 21.3 MPa

Elongation at Break⁹⁾ ISO 527 7.4 % - 1.8 %

Young's Modulus¹⁰⁾ ISO 527 1958 MPa - 1608 MPa

Flexural Properties^{6) 11)}

Standard

Average Values

XY-Direction

XZ-Direction

ZX-Direction

Flexural Strength ISO 178 56.6 MPa 58.3 MPa 38.6 MPa

Flexural Modulus ISO 178 1833 MPa 1767 MPa 1586 MPa

Flexural Elongation at Break ISO 178 5.3 % 5.0 % 3.1 %

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. Values in this document are average values, measured and calculated according to the instructions in the listed standards. The used specimens are produced with the Fused Filament Fabrication method. Measured values can vary depending on used print orientation and print parameters.

Please contact us for further product information, like for example REACH, RoHS, FCS.

The safety data given in this publication is for informational purposes only and does not constitute a legally binding MSDS. The relevant MSDS can be obtained upon request from your supplier or you may contact Forward AM Technologies GmbH directly at sales@forward-am.com.

Process materials in a well-ventilated room, or use professional extraction systems.

³⁾ Please note: To ensure constant material properties the material should always be kept dry.

⁴⁾ measured on filament

⁵⁾ Samples were conditioned in standard climate (23°C, 50% RH 72h)

⁶⁾ 

⁷⁾ 

⁸⁾ 

⁹⁾ Testing speed: 5 / 200 mm/min

¹⁰⁾ Testing speed: 1 mm/min

¹¹⁾ Testing speed: 2 mm/min

Measured on milled specimens

Impact Properties ⁶⁾	Standard	Average Values		
		XY-Direction	XZ-Direction	ZX-Direction
Impact Strength Charpy (notched)	ISO 179-2	16 kJ/m ²	17.4 kJ/m ²	2.8 kJ/m ²
Impact Strength Charpy (unnotched)	ISO 179-2	36.4 kJ/m ²	42.2 kJ/m ²	6.8 kJ/m ²
Impact Strength Izod (notched)	ISO 180	18.8 kJ/m ²	18.9 kJ/m ²	3.5 kJ/m ²
Impact Strength Izod (unnotched)	ISO 180	40 kJ/m ²	35.7 kJ/m ²	7.2 kJ/m ²

For the diagrams on mechanical properties see Chapter: [Mechanical Properties Diagrams](#)

Thermal Properties ⁶⁾	Standard	Average Values
HDT A at 1.8 MPa	ISO 75-2	90 °C
HDT B at 0.45 MPa	ISO 75-2	96 °C
Vicat softening point at 50 N	ISO 306	94 °C
Vicat softening point at 10 N	ISO 306	102 °C
Glass Transition Temperature	ISO 11357-2	104 °C
Melt Volume-Flow Rate (MVR)	ISO 1133	24 cm ³ /10 min (260 °C, 5 kg)

For the diagrams on thermal properties see Chapter: [Thermal Properties Diagrams](#).

Hardness and Abrasion	Standard	Typical Values
Shore Hardness D (15s)	DIN ISO 7619-1	71

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. Values in this document are average values, measured and calculated according to the instructions in the listed standards. The used specimens are produced with the Fused Filament Fabrication method. Measured values can vary depending on used print orientation and print parameters.


Please contact us for further product information, like for example REACH, RoHS, FCS.

The safety data given in this publication is for informational purposes only and does not constitute a legally binding MSDS. The relevant MSDS can be obtained upon request from your supplier or you may contact Forward AM Technologies GmbH directly at sales@forward-am.com.


Process materials in a well-ventilated room, or use professional extraction systems.

Mechanical Properties Diagrams


Comparison Ultrafuse® ABS and Ultrafuse® ABS Fusion+

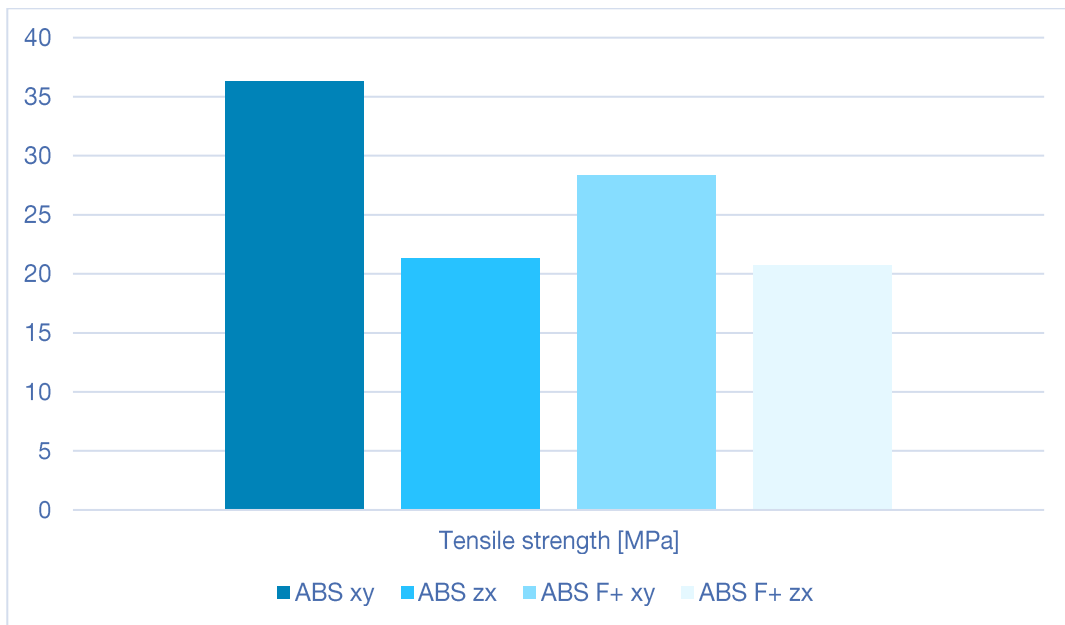


Tensile strength comparison Ultrafuse® ABS and Ultrafuse® ABS F+

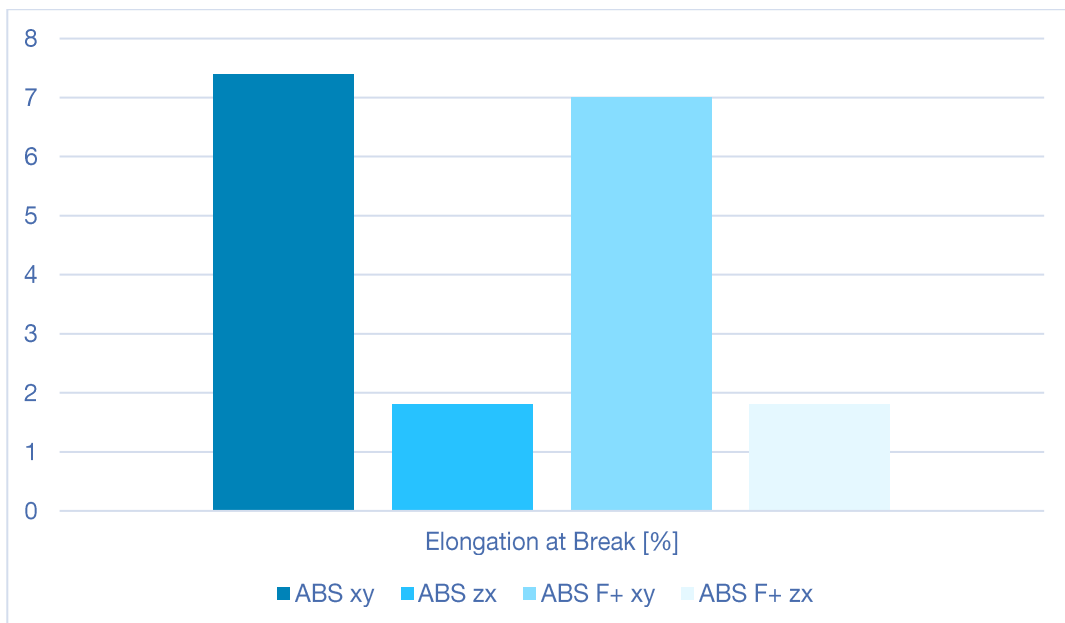


Elongation at Break comparison Ultrafuse® ABS and Ultrafuse® ABS F+

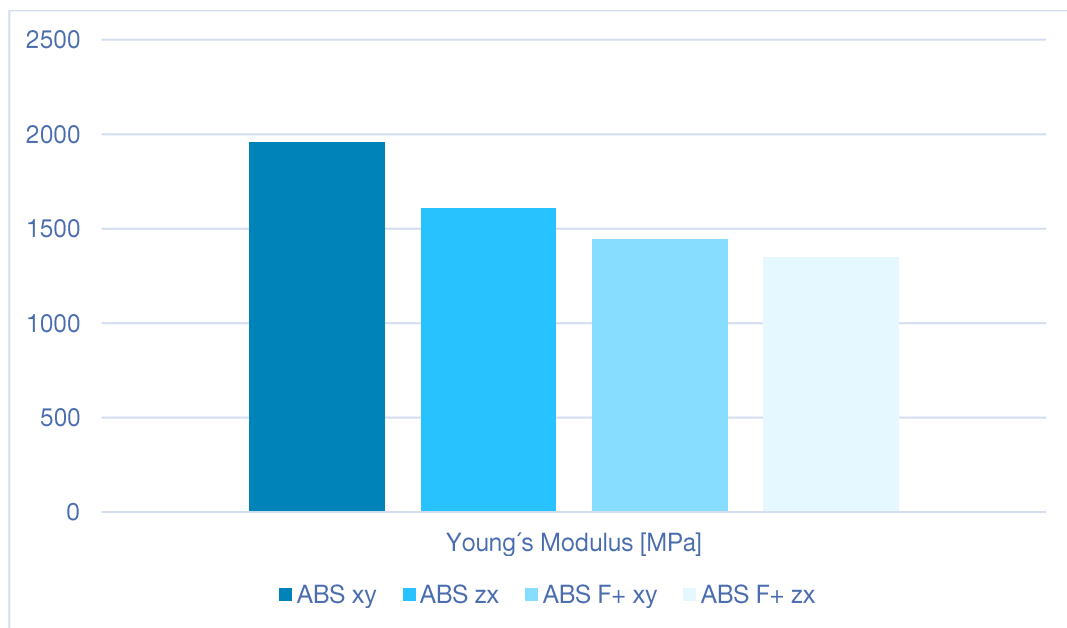


Young's modulus comparison Ultrafuse® ABS and Ultrafuse® ABS F+

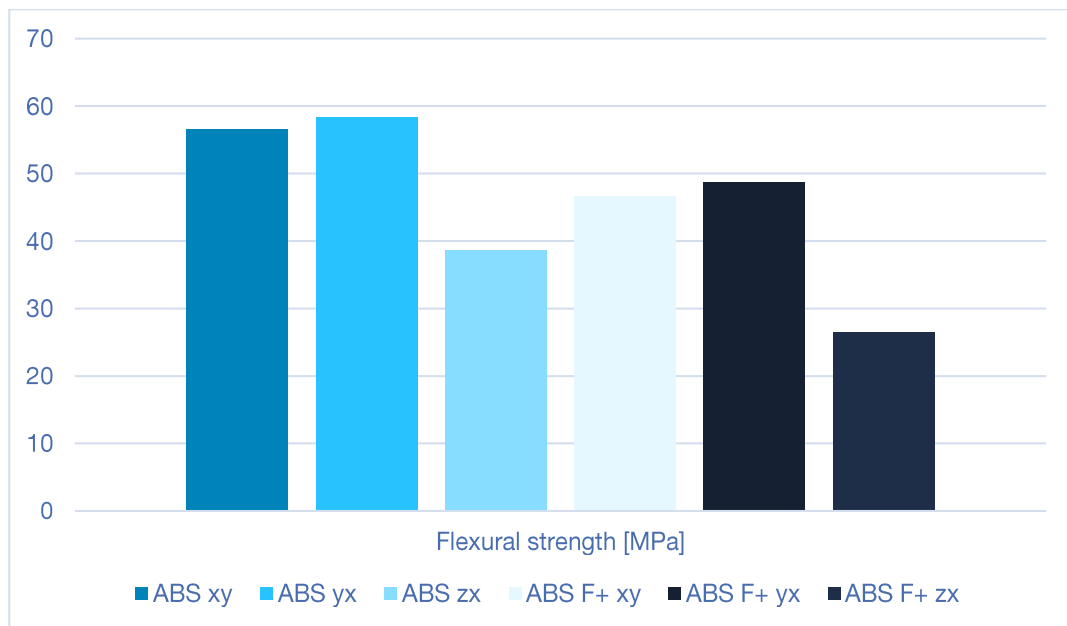


Flexural strength comparison Ultrafuse® ABS and Ultrafuse® ABS F+

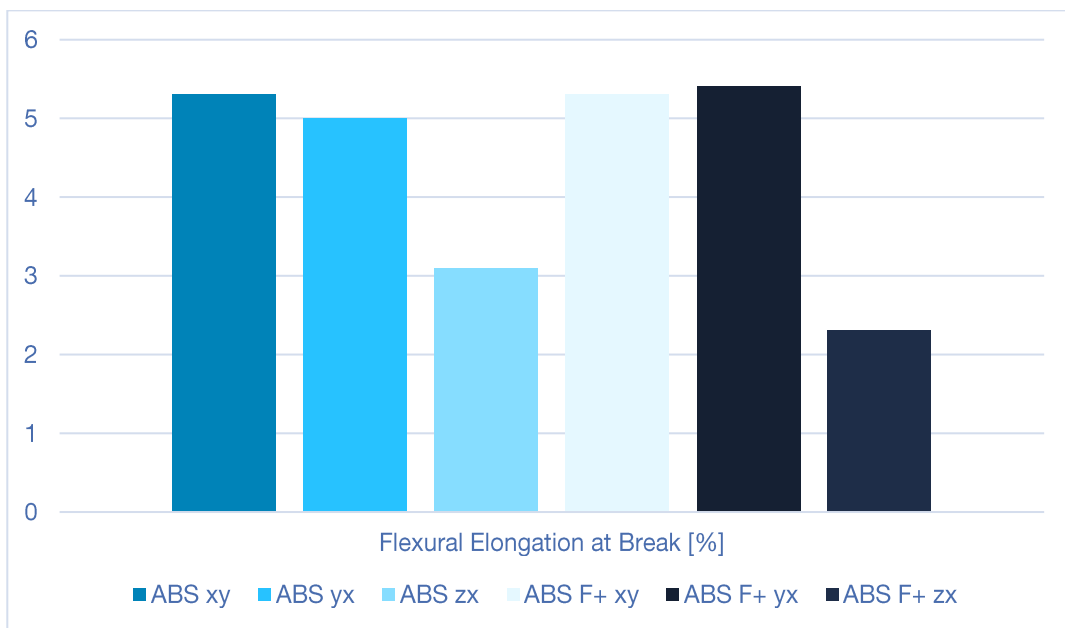


Flexural Elongation at Break comparison Ultrafuse® ABS and Ultrafuse® ABS F+

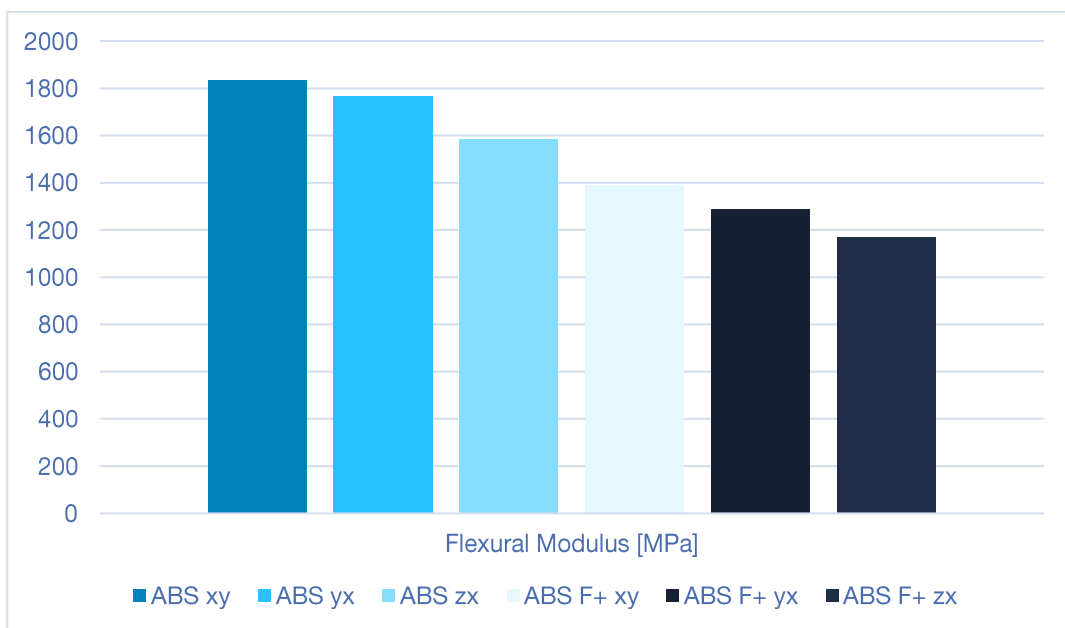


Flexural Modulus comparison Ultrafuse® ABS and Ultrafuse® ABS F+

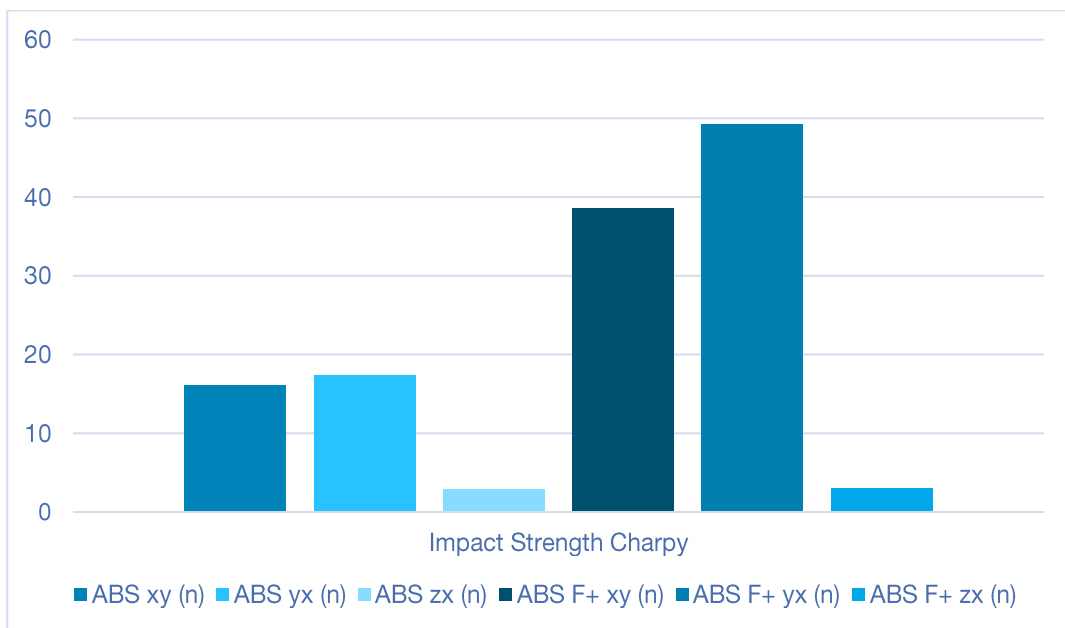


Impact Strength Charpy notched comparison Ultrafuse® ABS and Ultrafuse® ABS F+

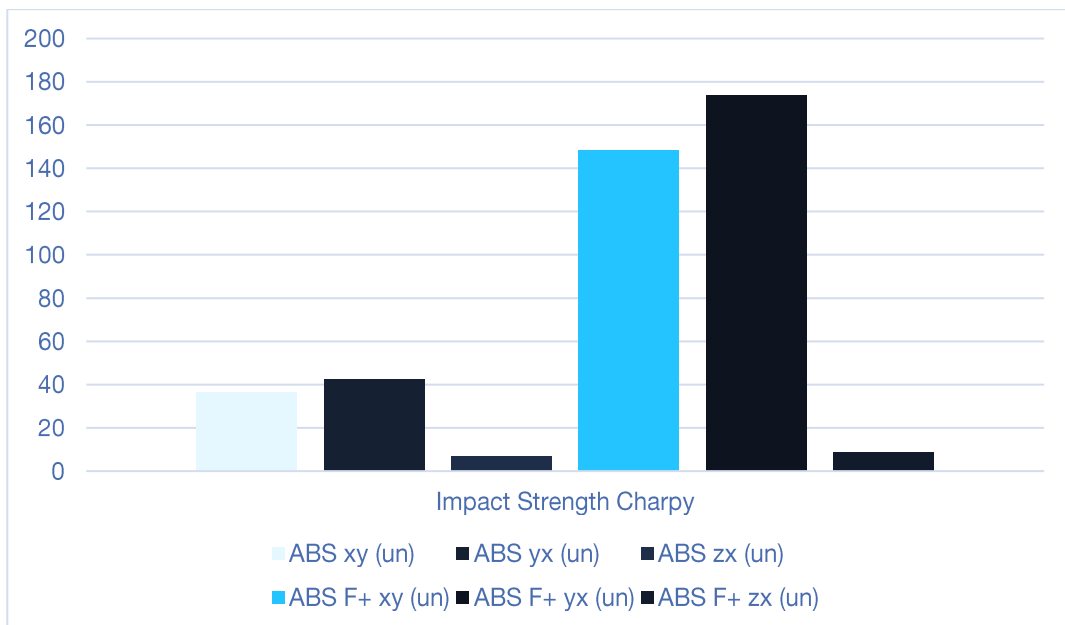

Impact Strength Charpy unnotched comparison Ultrafuse® ABS and Ultrafuse® ABS F+

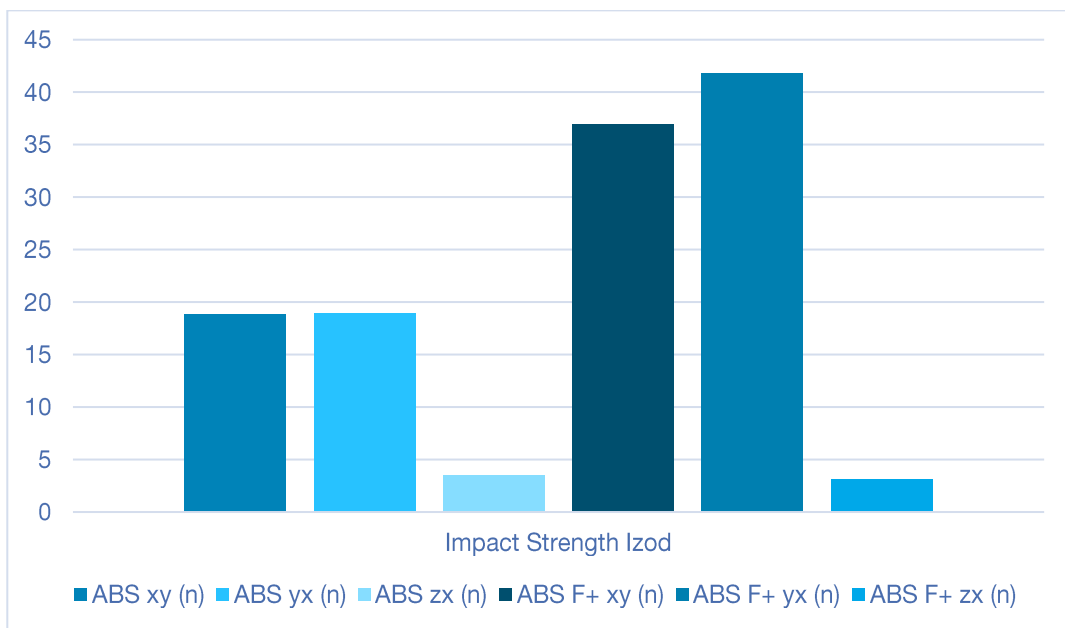


Impact Strength Izod notched comparison Ultrafuse® ABS and Ultrafuse® ABS F+

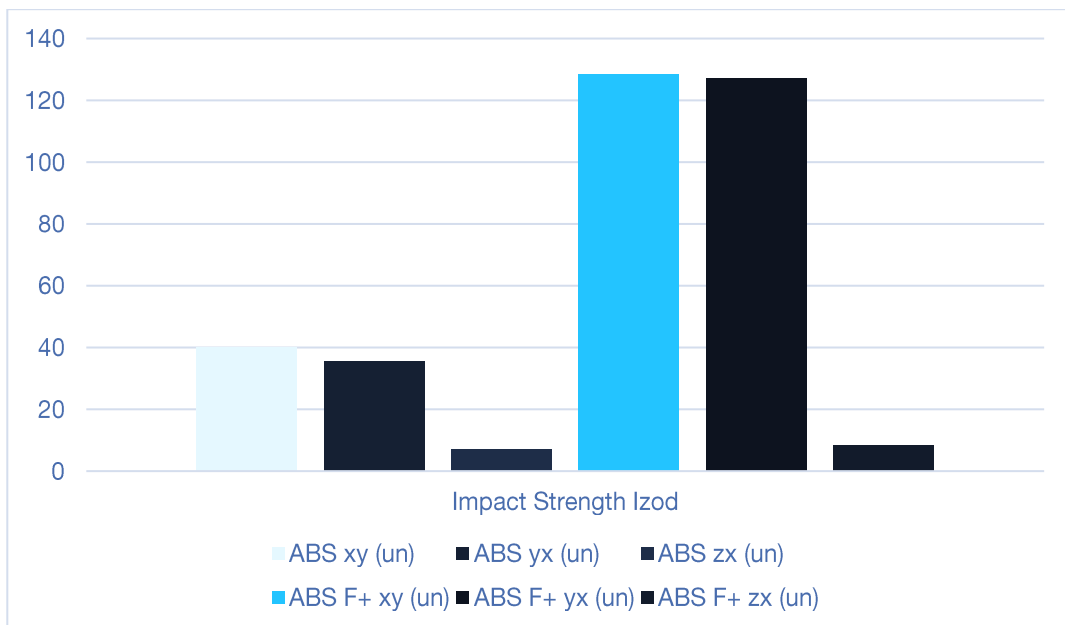


Impact Strength Izod unnotched comparison Ultrafuse® ABS and Ultrafuse® ABS F+

Thermal Properties Diagrams

Comparison Ultrafuse® ABS and Ultrafuse® ABS F+

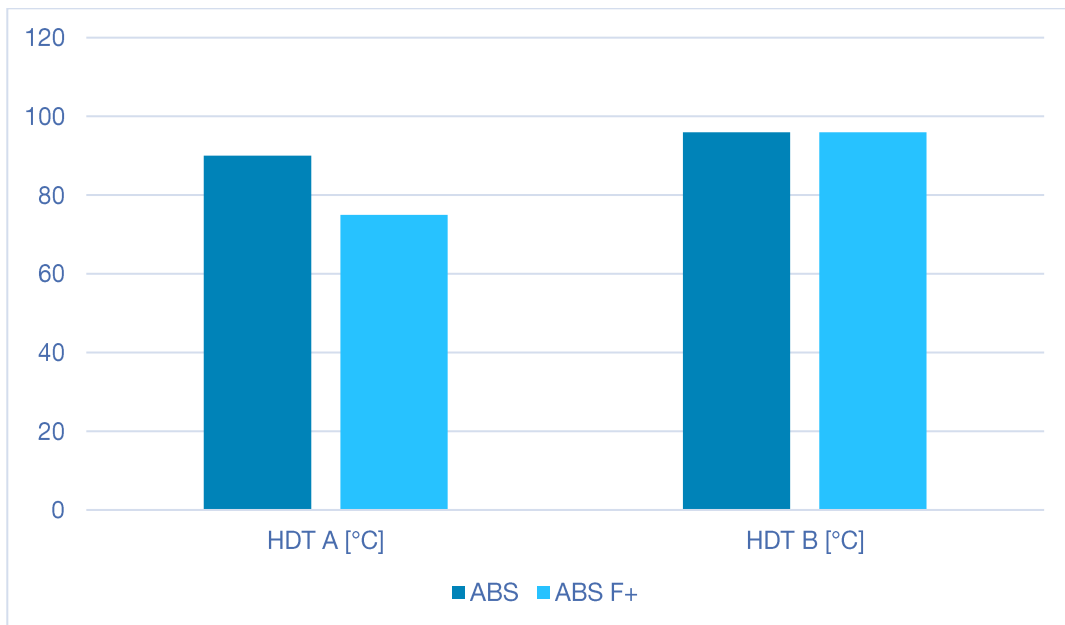

HDT comparison Ultrafuse® ABS and Ultrafuse® ABS F+

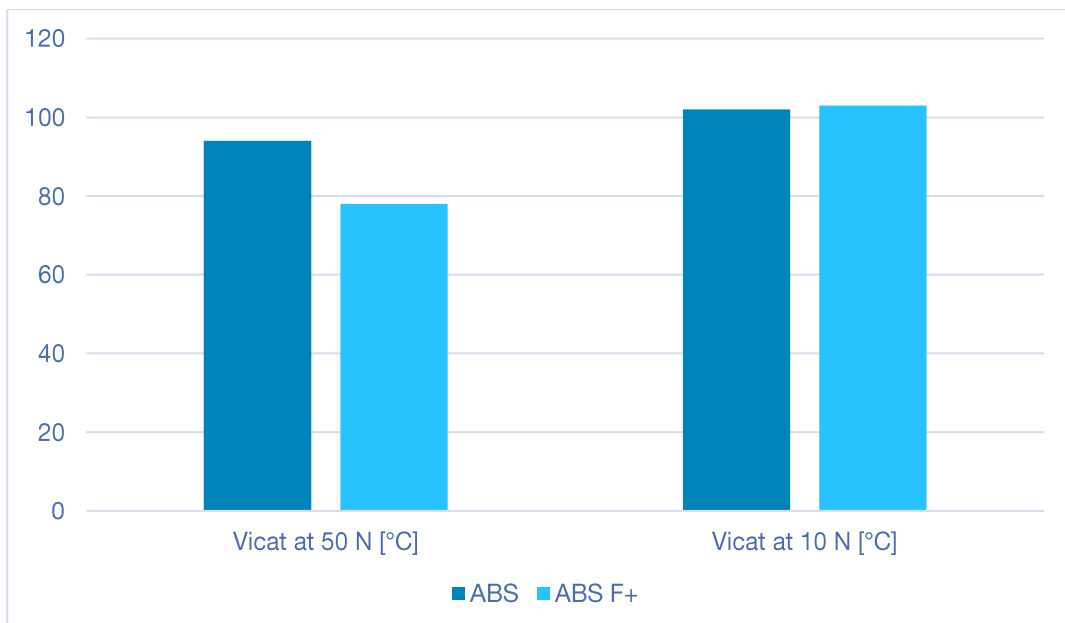

Vicat comparison Ultrafuse® ABS and Ultrafuse® ABS F+